





Instruction Manual
Ecobright series [EL-SL12]



Technical Parameters


Product Specifications	20W	30W	40W	50W	60W	80W	90W	100W	120/140W	150W	200W
Input Voltage	AC100-277V										
Power Frequency	50 / 60 Hz										
CRI	Ra 70										
Beam Angle	Type III										
IP and IK Rating	IP66 / IK08										
Outlook Dimension	348x173x77mm			445x230x88mm				555x311x88mm			
Luminaire Net Weight	1.8Kgs			3.0Kgs				4.2 Kgs			
System Efficacy	150 (±5%) LM/W (@CCT 5700° K)										
Power Factor	> = 0.97										
Lifespan	≥50000Hrs										
Working Temperature	-20°C to 50°C										
Working Humidity	15% ~ 90% RH										
Storage Temperature	-30 ~ +70°C										
Installation pipe Dia	Φ 60MM										
Garantie	03 Ans										

Physical Dimensions (Unit:mm)

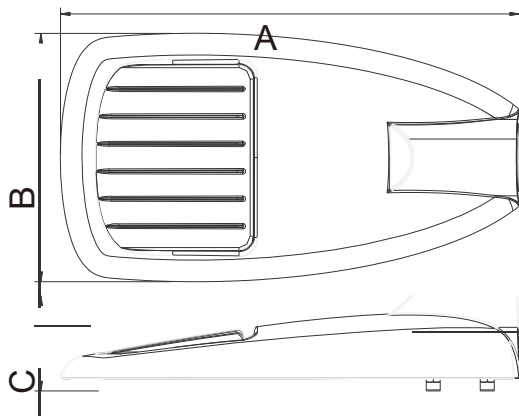

MODEL	Pipe Dia
MINI	Φ 48MM
S	Φ 60MM
M	Φ 60MM

	A(mm)	B(mm)	C(mm)
MINI	348	172	77
S	425	230	88
M	555	311	88



Wiring:


1. Connect supply wires to luminaire wire leads per the wiring diagram using methods that comply with all applicable codes.
2. Turn power on.



SKYZONTM
ALGERIA

EL-SL12 LED Street Light

Mounting

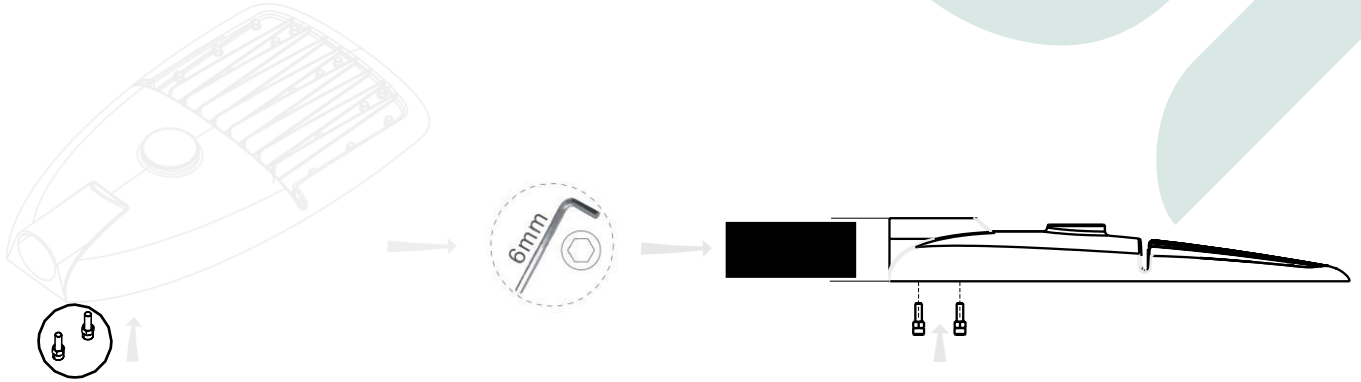

The luminaire shall only be repaired or maintained by the manufacturer or his service agent or a qualified electrician.



Caution, risk of electric shock



This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collect on systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.